


RECOMMENDED VACCINE MONITORING LOGGER



UTRED30-16
30 Day Logger with Display

LogTag Recorders

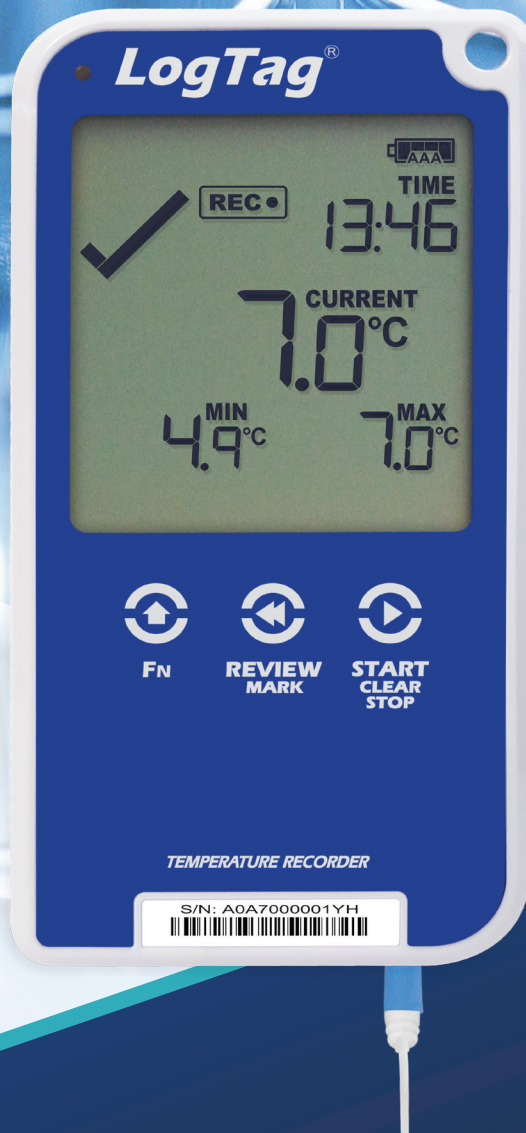


The LogTag® UTRED30-16 Temperature Recorder measures and stores up to 16,000 temperature readings.


It features a large easy-to-read display and is designed to show 'at a glance' if temperature excursions have occurred during the current day and up to the previous 29 days.

The alarm is triggered if temperature readings are outside pre-set alarm limits which is indicated by a large X on the display and, if configured, the audible alarm will sound.


Accessories




2x AAA Batteries
Not Included



USB Cable
Included



AC Adapter
Not Included



Wall Mount
Not Included



Glycol Buffer
Not Included



External Probe
Not Included. (Required)

Probes are available with a 1.5m or 3m cable.
E.g. ST100J-15 for 1.5m or ST100J-30 for 3m cable.

Compatible probes below:

| | |
|---------------|--|
| ST100J | 40mm tip length, ø3.2mm. |
| ST100K | 65mm tip length, ø3.2mm. |
| ST100L | 90mm tip length, ø3.2mm. |
| ST100S | 30mm tip length, ø5mm. |
| ST100T | 140mm tip length, ø5mm. |
| ST100H | Handled with 105mm tip length, ø5mm. |
| ST100B | Untipped (bare probe). |
| STX50 | 5 Meter extension cable for ST10/ST100 probes. |

Features



Read current temperature and latest Min-Max temperature at a glance.




Download data via LogTag Analyzer or as a PDF (no software required).



Audible alarm and flashing red LED signals a temperature alarm.



Check and reset Min-Max temperature reading at any time.



Can be powered by 2x AAA batteries (user replaceable) if not external powered.



View alarm status for up to 30 days at a glance.



Auto-pause function suspends alarm & statistic processing when the external probe is unplugged.



Measure and store up to 16,000 readings – enough for 67 days at 6 minute logging.



Second battery backup via a coin cell to ensure no data is lost.



Inspections can be recorded at the push of a button.

Applications



Pharmaceuticals



Warehouse



Cold Room



Industrial



Produce



Clinic



Transportation



Refrigerated Containers

Specifications

| | |
|---|---|
| Product Model | UTRED30-16. |
| External Sensor Measurement Range | -40°C to +99°C. (-40°F to 210°F). |
| Operating Temperature Range | -30°C to +60°C (-22°F to +140°F). |
| Storage Temperature Range | -10°C to +40°C (14°F to +104°F). |
| Rated Temperature Reading Resolution | Better than 0.1°C (0.2°F) for -30°C to +60°C (-22°F to +140°F). Better than 0.2°C (0.4°F) for -40°C to -30°C (-40°F to -22°F). Better than 0.5°C (0.9°F) for +60°C to +99°C (+140°F to +210°F). LogTag Analyzer® currently displays to one decimal place of °C or °F. The native resolution is what is stored in the LogTag®. |
| Sensor Reaction Time | Typically less than 2 minutes(T90) in moving air (1m/s) for ST100S type |
| Rated Temperature Reading Accuracy | Better than ±0.5°C (±0.9°F) for -20°C to +40°C (-4°F to +104°F), typically ±0.3°C (0.6°F). Better than ±0.8°C (±1.4°F) for -40°C to -20°C (-40°F to -4°F), typically ±0.5°C (0.9°F). Better than ±0.8°C (±1.4°F) for +40°C to +70°C (+104°F to +158°F), typically ±0.7°C (1.3°F). Better than ±1.2°C (±2.2°F) for +70°C to +99°C (+158°F to +210°F), typically ±1°C (1.8°F). |
| Recording Capacity | 16,129 temperature readings. 67 days at 6 minute logging. Day summary statistics memory (for display on LCD): up to 30 days of Min/Max/duration and alarm trigger statistics. |
| Sampling Interval | Configurable from 30 seconds to 18 hours. |
| Logging Start Options | Push button start (with configurable start delay from 1 minute to 72 hours) or specific date & time. |
| Download Time | Typically with full memory (16,129 readings) in less than 10 seconds. |
| Environmental | IP51 (when vertically mounted or hung with USB dust-cap in place). |
| Power Source | 5V via micro USB socket or 2 x 1.5V AAA batteries. CR2032 LiMnO ₂ coin cell (backup logging function only). |
| Battery Life | AAA battery up to 12 months - if unit is operated without power supply. |
| Real Time Clock | Built-in real time clock. Rated accuracy ±25ppm @ 25°C (equivalent to 2.5 seconds/day). Rated temperature coefficient is -0.034 ±0.006ppm/°C (i.e typically +/- 0.00294 seconds/day/°C). |
| Standard Remote Probe Cable Lengths | Standard: 1.5m (4'11"). Extended: 3m (9'10") (recommended maximum). |
| Remote Sensor Cable Type | PTFE (FDA food contact rated) coaxial. |
| Connection Interface | USB 2.0 / Micro USB Socket. |
| Size | 123mm(H) x 63mm(W) x 12.5mm(T). |
| Weight | 250g with AAA batteries, (80g - excluding probe and AAA batteries). |
| Case Material | Polycarbonate. |

